

## NEW MANGALORE PORT AUTHORITY Mechanical Engineering Department

Panambur, Mangalore - 575 010.

Phone: 0824- 2887706/753

No. 20/114/2025-26/EE(M)III/OTM-FT

Date: 20.06.2025

To,

The Prospective Bidders,

Sir,

Sub: Mech. Div. - Replacement of 1 No. Foam Tank at Oil Jetty Berth No.10 including Design, Fabrication, supply, erection and Testing - Budgetary Quotation Requested - Reg.

Budgetary Quotations are invited for, Fabrication, Supply, Erection and Testing and removal of existing Foam tank as per BOQ of SS Foam Tank as per Terms and conditions detailed bellow.

SI.	Description of item	Unit	Qty.	Rate in	Amount in
No.				Rs	Rs.
1.	Dismantling of existing old Foam Tank of Berth No.10. including Rooftop Shifting and stacking of dismantled items near to control tower of Berth No.11.	-	-	-	LS
2.	Fabrication, Supply, Erection and testing of 15 KL of foam Tank of SS 316 material, thickness 6 mm as per the drawing enclosed including all fittings and required foundation, Testing means water fill-up and leak test and fixing of removed rooftop as per the existing.	-	-	<u>-</u>	LS

## Terms and conditions:

- 1. Old removed pipeline, fixed to foam tank to be connected to newly laid pipeline as per existing.
- 2. The rate quoted shall be inclusive of all taxes & duties excluding GST and the same shall be firm & final. The rate quoted shall be inclusive of all expenses such as labour cost, material cost, consumables required for the work, fasteners, transportation, tools & tackles, other incidental charges etc. Complete required for successful completion of the subject work excluding GST. GST shall be shown separately in the Bill of Quantity. GST as applicable shall be paid extra.

- 3. The rate quoted should be valid for at least 60 days from the due date of submission of offer.
- 4. The Tenderer may visit the work site and get acquainted himself with the site conditions, nature of work involved before quoting, taking prior appointment with the undersigned. Any assistance in this regard will be provided by the Department.

## 5. Completion of Work:

- (i) Fully fabricated SS Foam tank should be delivered at site within 60 days of receipt of work order.
- (ii) Erection work at site shall be commenced within 60 days from the date of receipt of W/O. The time allowed for completion of erection work at site is 30 working days, after receipt of fully fabricated Foam Tank at site.
- (iii) In any Case entire Scope of work should be completed within 90 days of receipt of W/O
- (iv) During the Berthing of Oil Tankers at Oil Jetty (Berth No. 10), works will not be permitted at the jetty. Number of days for the completion of erect work will be reckoned based on the days berth will be made available to the contractor. Working day means 8 hours non-occupancy of tankers in day time from 8.00 AM to 5.00 PM.
- (v) The successful contractor will be given one day advance notice regarding availability of Berth during day time, to carry out the work. Such days will only be considered as working days.
- (vi) Testing of Tank shall be done at NMPA site. Testing means water fill-up Test. Water will be provided at NMPA at free of Cost.
- 6. The Employer or his representative shall have right to inspect the fabrication work being carried out under this contract and to test the fabricated items to confirm conformity with the specifications.
- 7. The contractor is required to be equipped with manpower and materials, equipment, tools & tackles, consumables etc. required for carrying out the work at all time and commence the work within 24 Hrs. after the information is passed on to him regarding the free availability of Jetty.
- 8. **LIQUIDATED DAMAGES**: In case of delay in completion of the work, Liquidated Damages (L.D) may be levied at the rate of 0.5% of the contract price plus applicable GST per week (considering working days only) delay, or part thereof subject to a maximum of 10 percent of the contract price.
- 9. The contractor shall obtain hot work permission from the competent authority of NMPA for carrying out the hot works. The copy of the same shall be given to AEE(M), OTM Sub Division before commencing the works.
- 10. Power supply will be given to the Contractor on free of cost for the said works. Tapping of power from the source point of NMPA to the required location will have to be arranged by the Contractor at his cost conforming to IE Rules / Standards.

- 11. The contractor shall be responsible for taking precautionary measures for the safety of the work men working under him and the responsibility arising due to any mishap during the execution of work, the payment of compensation, if any, lies entirely on the part of the Contractor. The Contractor has to employ skilled and competent workers for carrying out the work. The workmen shall have insurance cover during the course of execution of work.
  - 12. Any damages to the departmental properties during the execution of works will be on contractor's account.
  - 13. The wharf entry passes (Red Pass) shall be provided to the contractor and their workmen & vehicles by the Department free of cost as per the Rules. The required documents for the same shall be provided by the Contractor well in advance.
  - 14. The AEE(M), OTM Sub Division is the Engineer in-charge of the work and work will be carried out to the entire satisfaction of the Engineer in-charge.
  - 15. The work carried out shall be guaranteed for a period of One Year from the date of satisfactory completion of the work.

## 16. Payment Terms:


- i) 90% payment with applicable GST will be made within 15 days from the date of receipt of Invoice, duly completing the entire work as per the scope of work.
- ii) Balance 10% payment of quoted amount with applicable GST shall be retained towards security deposit and will be released without interest after completion of Guarantee period of one year
- 17. Statutory taxes as applicable will be deducted while releasing payment.
- 18. The acceptance of the Quotations rests with the competent authority of NMPA who does not bind himself to accept the lowest tender and reserves to himself the authority to reject any or all the tenders received without assigning any reason.

19. The offers enclosed in a sealed cover super scribed as "Replacement of Foam Tank at Oil Jetty Berth No. 10 including, Fabrication, Supply, Erection and Testing shall reach to the under signed on or before 30.06.2025 at 15:30 Hrs. to the below mentioned address. Budgetary Quotations will be opened on the same day at 16 hrs.

Copy to File.

EE(M)III OTM
कार्यपालक अभियंता, (एम) III
Executive Engineer, (M) III
नय मंगलूर पत्तन प्राधिकरण
New Mangalore Port Authority
पणंबुर, मंगलूर – ५७५०१०

Panambur, Mangalore - 575 010

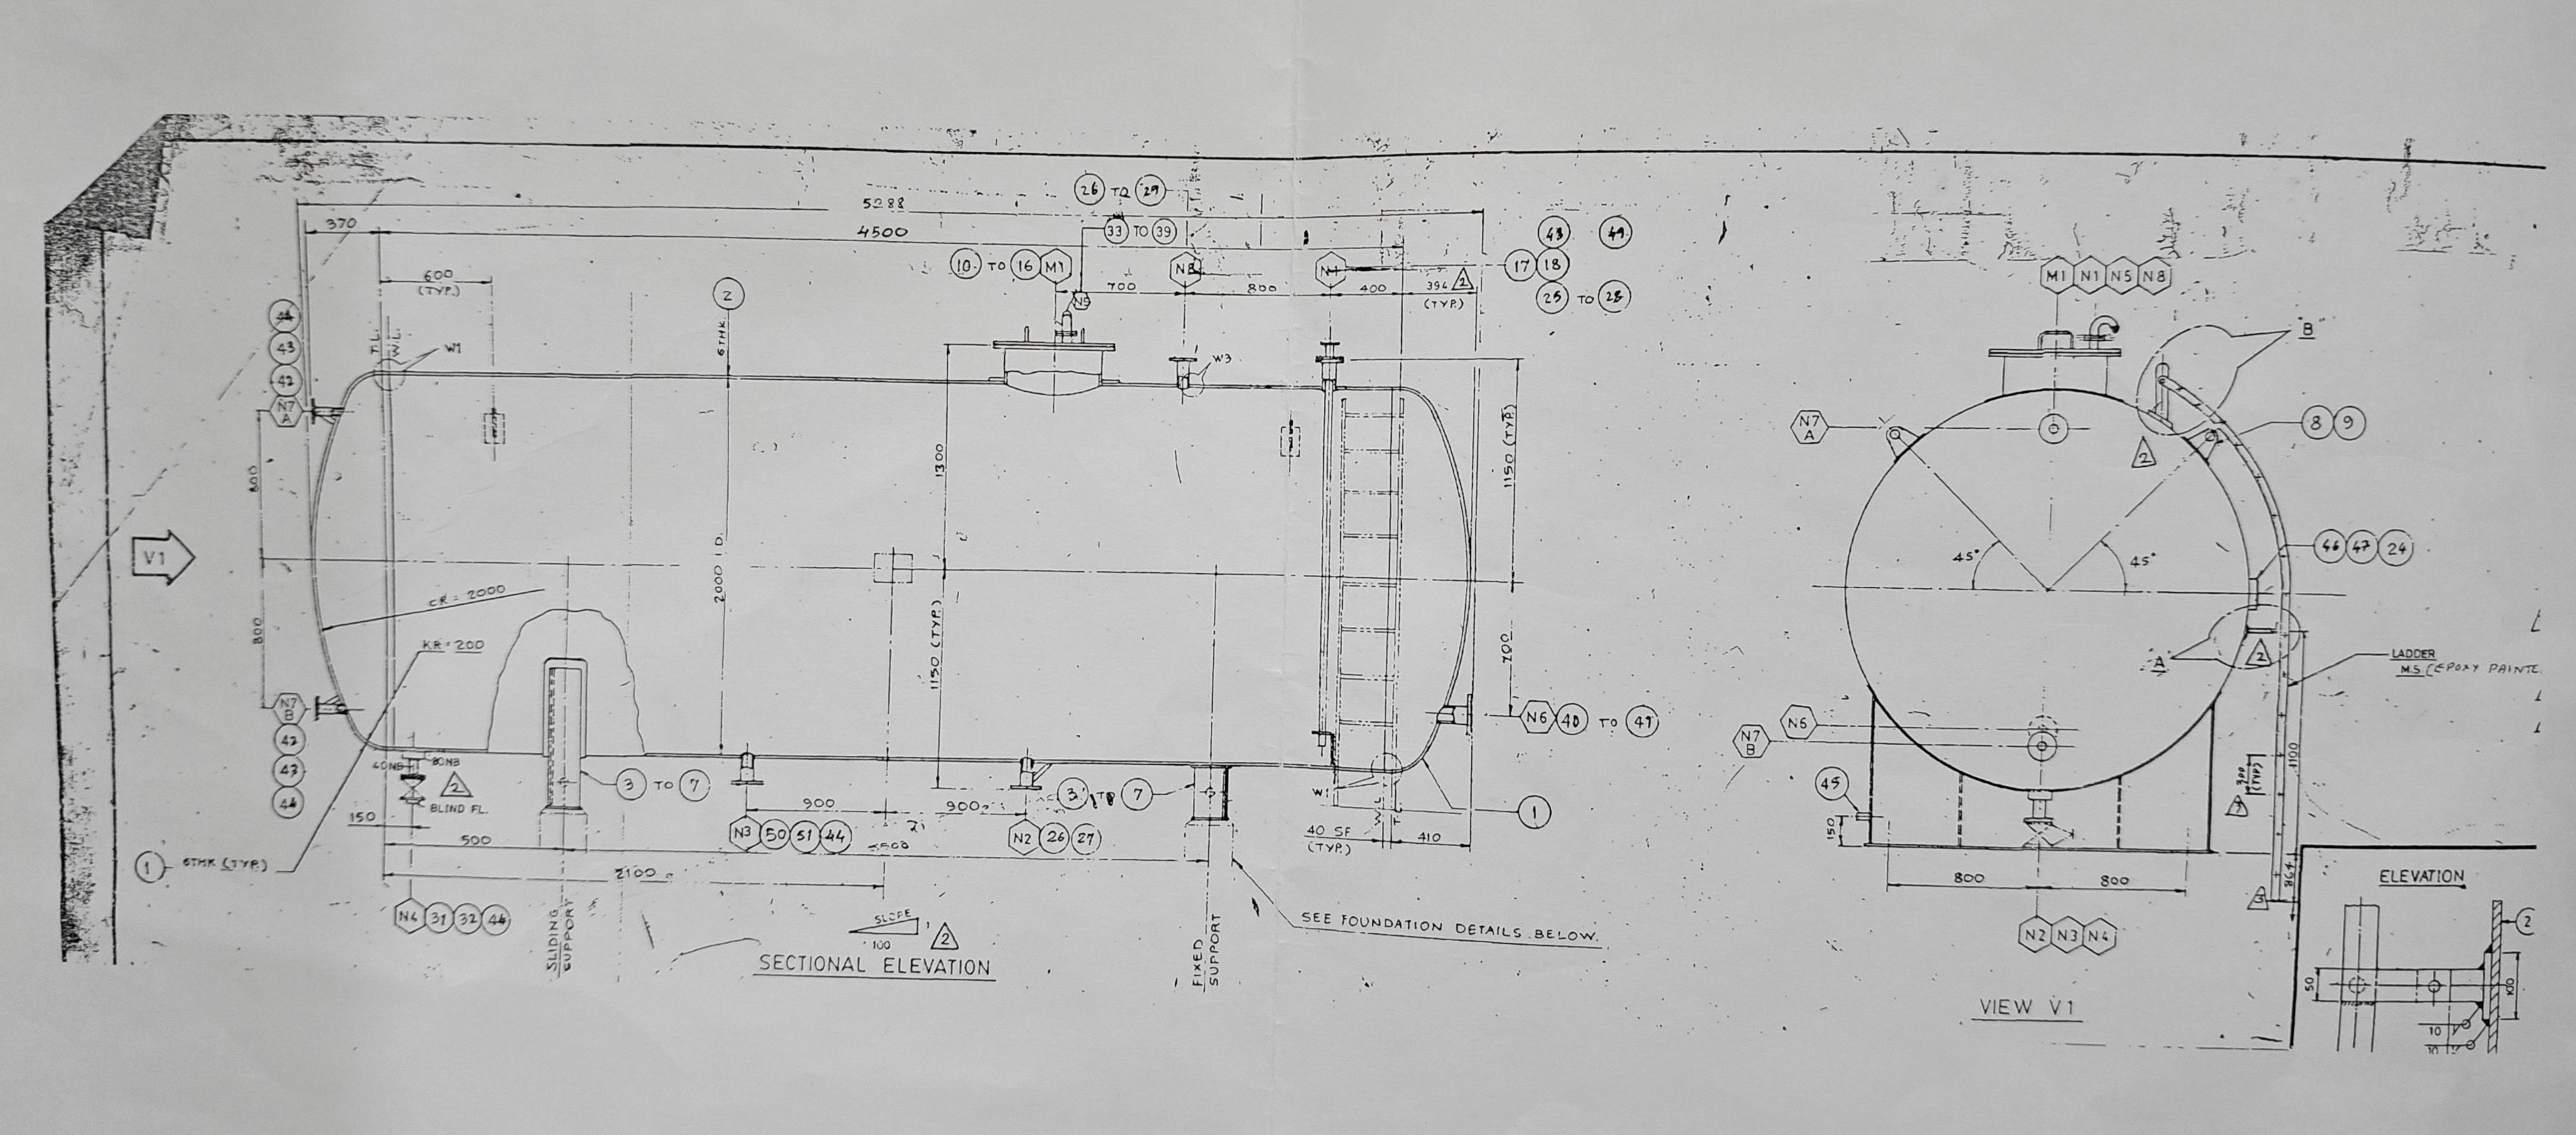

कार्यपालक अभियंता, (एम) III
Executive Engineer, (M) III
नव मंगलूर पत्तन प्राधिकरण
New Mangalore Port Authority
पणंबूर, मंगलूर – ५७५०१०
Panambur, Mangalore - 575 010