



नव मंगलूर पत्तन प्राधिकरण/ **NEW MANGALORE PORT AUTHORITY**  
यांत्रिक विभाग / **MECHANICAL ENGINEERING DEPARTMENT**  
पणंबूर, मंगलूर - ५७५०१० Panambur, Mangalore - 575 010.  
फोन: ०८२४- २८८७७७७/७०६/७५३ Phone: 0824- 2887777/710/712.

**No.6/5/2024-25/EE(M)/AEE(Tech)**

Date : 26.06.2024

To:

The prospective Bidders

Sir,

Sub:- NMPA-Mechl. Division I - Supply of 35 nos. Galvanized steel road Barricades  
for NMPA Panambur- Budgetary offer requested- Reg.

\*\*\*\*\*

Please be good enough to send your lowest budgetary offer for Supply of 35 nos.  
Galvanized steel road Barricades for NMPA Panambur for the following works.


Sl. No.	Description / Technical Specification of the Barricade	Qty	Amount.
1.	Supply of Galvanized Steel Road Barricades as per drawing & specifications given (Drawing enclosed). The required materials should be 1.5" dia class 'B' G.I.pipe, 18 SWG G.I. Sheet and 4"x4"x5mm thickness MS plate for leg support. Barricades should be Painted with one coat of Epoxy Primer (Red Oxide), intermediate one coat with golden yellow paint and another one final finishing Coat with reflective golden yellow paint and providing different safety slogans, NMPA emblem on either side of the Barricades in English, Hindi & Kannada versions, Safety slogans list enclosed.	35 Nos.	Rs.
	Sub Total		
	GST@		
	Total Amount		

....2



**Terms & conditions are as detailed below.**

1. The rate quoted shall be inclusive of all taxes & duties excluding GST and the same is firm & final. The rate quoted shall be inclusive of all expenses such as labor cost, material cost, consumables required for the work, transportation, tools & tackles, other incidental charges etc. complete required for successful completion of the subject work excluding GST. GST item shall be shown separately in the Bill of Quantity. GST as applicable shall be paid extra.
2. **Completion of Work:**  
The entire work shall be completed & supplied within 45 days from the date of issue of Work order.
3. **LIQUIDATED DAMAGES:** In case of delay in completion of the work, Liquidated Damages (L.D) may be levied at the rate of 0.5% of the contract price plus applicable GST per week (considering working days only) delay, or part thereof subject to a maximum of 10 percent of the contract price.
4. The Employer or his representative shall have right to inspect the fabrication work being carried out under this contract and to test the fabricated items to confirm conformity with the specifications.
5. The contractor shall be responsible for taking precautionary measures for the safety of the work men working under him and the responsibility arising due to any mishap during the execution of work, the payment of compensation, if any, lies entirely on the part of the Contractor. The Contractor has to employ skilled and competent workers for carrying out the work.
6. Any damages to the supplied Road Barricade during transit to be rectified by the Contractor.
7. The Supplied Road Barricades shall be guaranteed for a period of six months from the date of completion of work.
8. The offers enclosed in a sealed cover super scribed as "Supply of Galvanized Steel Road Barricades " shall be reached to the undersigned on or before **10.07.2024 at 15 Hours** to a below mentioned Address. Budgetary quotations will be opened on same day at **16.00 Hrs.**

  
26/6/24  
(Chandrashekar)

**Executive Engineer (M)**


कार्यपालक अभियंता, (एम) I  
Executive Engineer, (M) I  
नव मंगलूर पत्तन प्राधिकरण  
New Mangalore Port Authority  
पणबूर, मंगलूर - ५७५०१०  
Panambur, Mangalore - 575 010

**Address for Communication:**

Room No.234, 2<sup>nd</sup> Floor, Technical Cell,  
Mechanical Engineering Department,  
NMPA, Panambur, Mangalore.  
Karnataka-575010.  
Mobile No. 9448910767



## Road Barricade

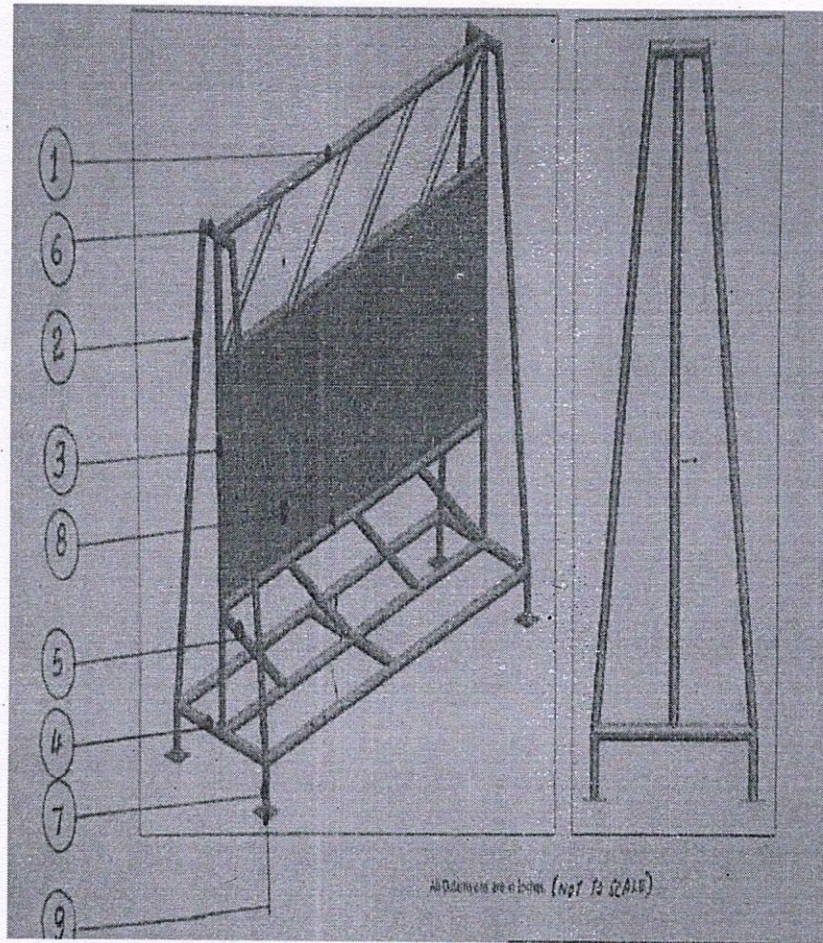

All Dimensions are in Inches (NOT TO SCALE)

Dimensions of 1 No. Road Barricade			
Item No	Description	Material	Qty
1	80*1.5D	G.I.Pipe	6
2	48*1.5D	G.I.Pipe	4
3	46*1.5D	G.I.Pipe	2
4	25*1.5D	G.I.Pipe	3
5	24*1.5D	G.I.Pipe	8
6	8*1.5D	G.I.Pipe	2
7	5*1.5D	G.I.Pipe	4
8	80*20 (18 SWG)	G.I.Sheet	1
9	4*4*5mm Thick	M.S.Plate	4